

DS-KH2220

Video Intercom Indoor Station


<https://aros.kz>

Key Features

- Hands-free video intercom communication
- Supports three indoor stations in the intercom system
- Supports monitoring the door station and the external analog camera
- Remote unlocking
- Wall mounting supported
- Convenient installation with/without the junction box



Typical Application

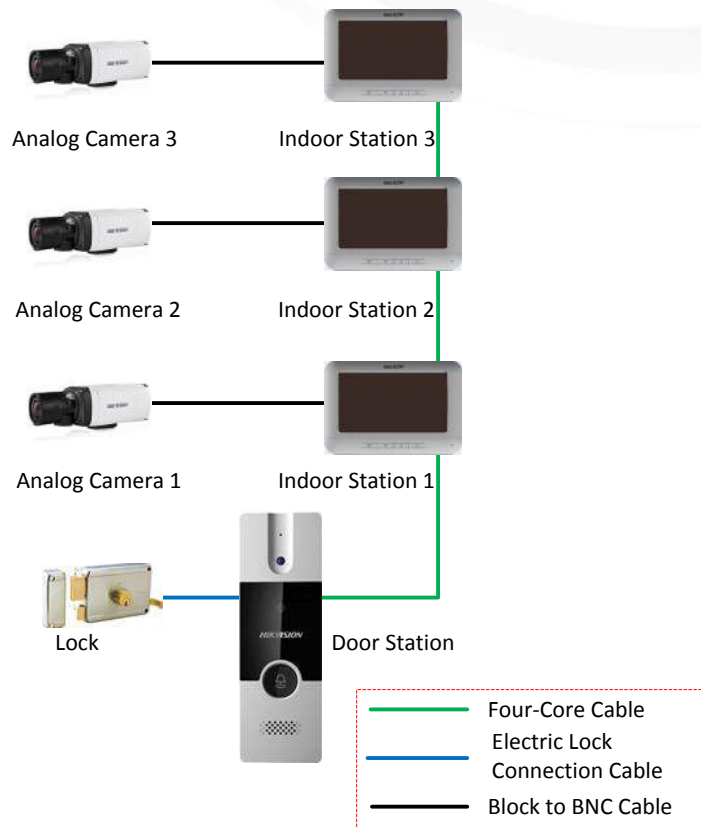


Specifications

Model	DS-KH2220	
Display parameters	Display screen	7-Inch Colorful TFT LCD
	Display resolution	800 × 480
	Operation method	Physical Button
Audio parameters	Audio input	Built-in Omnidirectional Microphone
	Audio output	Built-in Loudspeaker
	Audio quality	Noise Suppression and Echo Cancellation
Device interfaces	Four-wire interface	4 Four-Wire Interfaces
		1-ch Video Input, 1-ch Audio Input/Output, 1-ch Power Supply, 1-ch Grounding
General	Power supply	12 VDC
	Power consumption	≤5 W
	Working temperature	-10° C to + 55° C (14° F to 131° F)
	Working humidity	10% to 90%
	Dimensions (L × W × H)	195.8 mm × 132.8 mm × 18.39 mm (7.7" × 5.2" × 0.7")

Available Model

DS-KH2220

Physical Interfaces

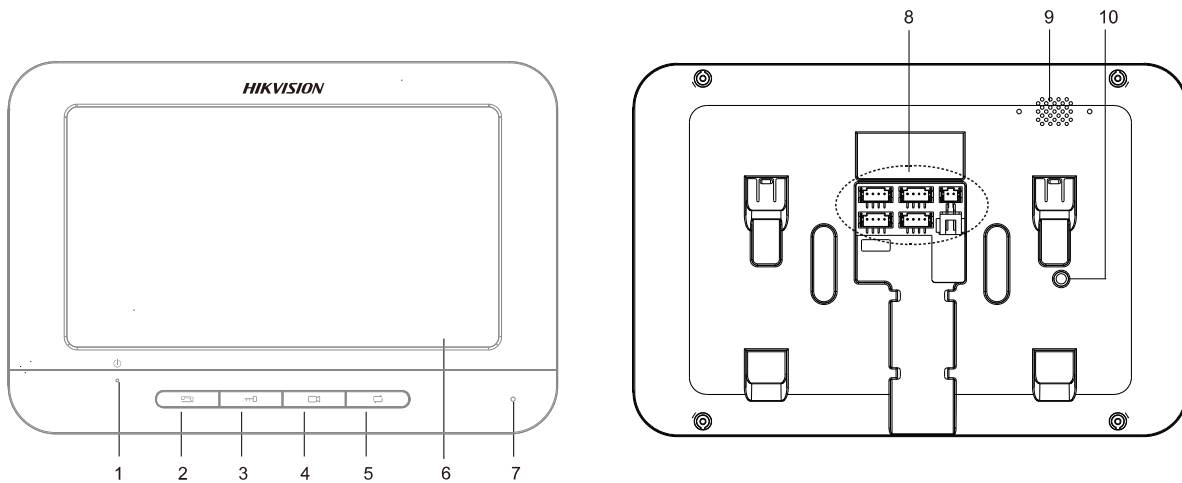

Index	Description	Index	Description
1	Power Supply Indicator	6	LCD Display Screen
2	Call Accept/Decline Key	7	Microphone
3	Unlock Key	8	Terminals and Interfaces
4	Live View Key	9	Loudspeaker
5	Switch Key	10	Volume Control Knob


DS-KB2421-IM Video Intercom Door Station

Key Features

- Hands-free video intercom communication
- Supports two door stations in the intercom system
- Self-adaptive IR supplement (with photoresistor)
- One-touch calling
- Pinhole camera with 720 x 576 @ 25 fps
- Unlock controlling
- Anti-oxidant zinc alloy
- Vandal-resistant
- Convenient installation
- IP65



Typical Application

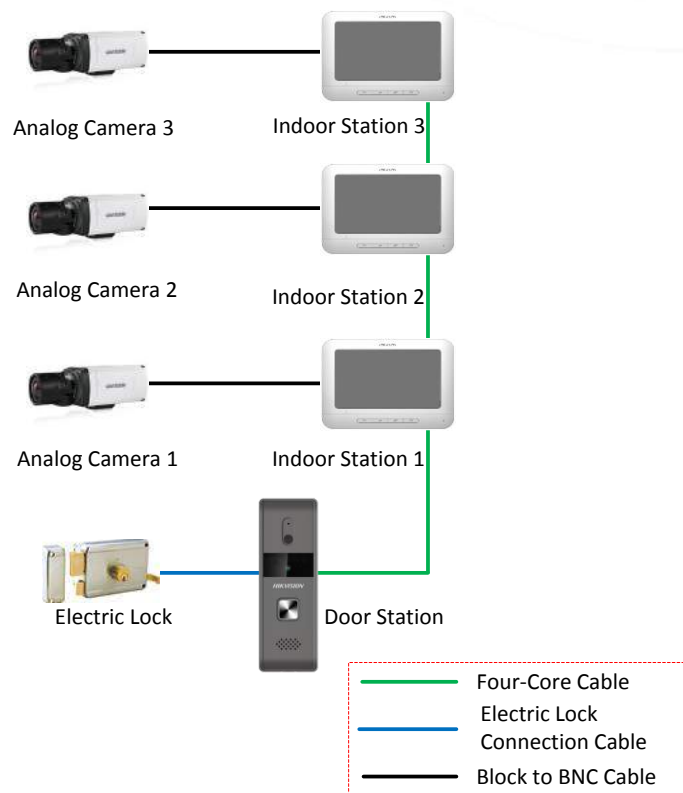


Specifications

Model		DS-KB2421-IM
Video parameters	Camera	1/4" CMOS
	Resolution	720 × 576
	Video frame rate	PAL: 25 fps
Audio parameters	Audio input	Built-in Omnidirectional Microphone
	Audio output	Built-in Loudspeaker
	Audio quality	Noise Suppression
Light supplement	Light supplement mode	Photosensitive IR Supplement, IR Range: 2 Meters
Device interfaces	Four-wire interface	1 Four-Wire Interface (1-ch Video Input, 1-ch Audio Input/Output, 1-ch Power Supply, 1-ch Grounding)
	I/O output	1 Relay Output
General	Material	Zinc Alloy
	Power consumption	Max. 5W
	Working temperature	-30° C to +70° C (-22° F to 158° F)
	Working humidity	10% to 90%
	Dimensions (L × W × H)	145 mm × 49.2 mm × 26.45 mm (5.7" × 1.9" × 1.0")

Available Model

DS-KB2421-IM

Appearance

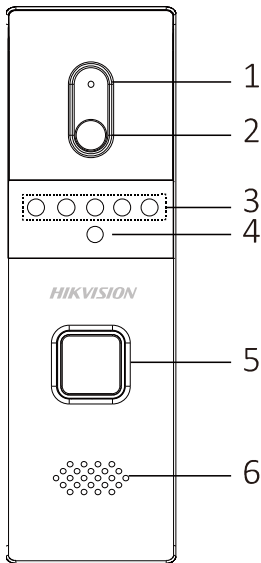

Index	Description
1	Microphone
2	Built-in Camera
3	Supplement Light
4	Photoresistor
5	Call Button
6	Loudspeaker

Distributed by



HIKVISION

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Europe
T +31-23-55-42-770
info.eu@hikvision.com

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision UK
T +01628-902140
support.uk@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Korea
T +82-31-731-8841
sales.korea@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Africa
T +27 (10) 0351172
sale.africa@hikvision.com

Hikvision Hong Kong
T +852-2151-1761