

ALTUS 40 RTS



MAIN CHARACTERISTICS & FEATURES

230V / 50Hz tubular motor.

The Altus 40 RTS is ideal for roller blinds with limited room. With its slim 38mm design, it can be adapted to \varnothing 40mm tubes or larger. A quiet drive and built-in radio receiver are a few of the design features of the Altus 40 RTS.

Remote set limits.

4 minute running time.

Suitable for tubes: \varnothing 40

Memory Capacity: 12 transmitters, plus 3 sensors.

Programmable "my" position.

Requires the use of a crown and wheel for tube adaptation.

Horizontal mount only.

Intermittent Usage.


40mm

ALTUS RTS 13/8	Torque (Nm)	13	Speed (RPM)	8
ALTUS RTS 4/14	Torque (Nm)	4	Speed (RPM)	14
ALTUS RTS 9/14	Torque (Nm)	9	Speed (RPM)	14



ALTUS 40 RTS



TECHNICAL CHARACTERISTICS

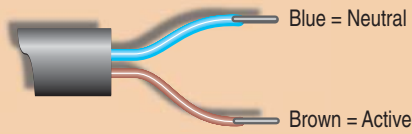

CLASS II
 The Altus 40 is classified as a Class II Double Insulated Device. As such an earth connection is NOT required.

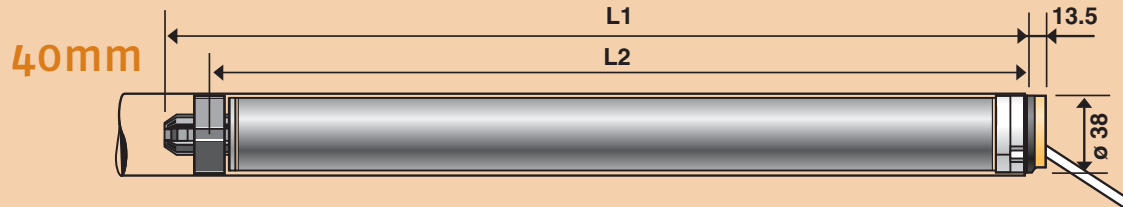

	ALTUS RTS 13/8	ALTUS RTS 4/14	ALTUS RTS 9/14
L1 (mm)	497	457	497
L2 riveting distance (mm)	473	433	473
Torque (Nm)	13	4	9
Speed (rpm)	8	14	14
Rated Voltage (V)	230	230	230
Rated Power consumption (W)	95	65	100
Rated Current (A)	0.5	0.35	0.5
Running time before thermal cut off (min)	4	4	4
Thermal cut off temp (°C)	140	140	140
Average running noise (dba)	54	52	54
Minimum tube diameter	40 x 1.5	40 x 1.5	40 x 1.5
Motor weight (kg)	1.21	1.01	1.18
Cable length (M)	1	1	1
Number of cores in cable	2	2	2
Cross section of cable (mm²)	0.75	0.75	0.75
Index Protection	IP44	IP44	IP44

NOTE
 Information about the noise is according to Somfy measures and is for information only. Taken as the worst value in load, for the up direction during the first 10 seconds of travel.

Normal functioning temperature: -10°C to +40°C

